




P Channel Lateral Mosfet

- Designed specifically for linear audio amplifier applications
- High-speed for high bandwidth amplifiers
- Reduced $V_{ds\ sat}$
- High voltage rating - 200V
- TO-247 plastic package
- Enhanced oscillation suppression in multi-device applications
- Complementary N-channel available – ECX10N20R

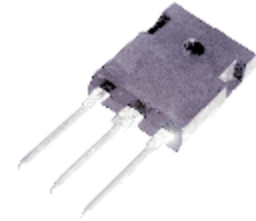

ABSOLUTE MAXIMUM RATINGS

($T_C = 25^\circ\text{C}$ unless otherwise stated)

V_{DSS}	Drain – Source Voltage	-200V
V_{GSS}	Gate – Source Voltage	+/- 14V
I_D	Continuous Drain Current	-8A
I_{DR}	Body Drain Diode Current	-8A
P_D	Allowable Power Dissipation* $T_{case} = 25^\circ\text{C}$	125W
T_{ch}	Channel Temperature	150°C
T_{stg}	Storage Temperature Range	-55 to +150°C

*Thermal Resistance, Junction To Case

1.0 deg/watt



ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
BV_{DSX}	Drain-Source Breakdown Voltage	$V_{GS} = 10V$ $I_D = -10mA$	-200			V
$V_{GS(off)}$	Gate-Source Cut-off Voltage	$V_{DS} = -10V$ $I_D = -100mA$	-0.15		-1.5	V
$V_{DS(sat)}^*$	Drain-Source Saturation Voltage	$V_{GD} = 0$ $I_D = -8A$			-10	V
$ y_{fs} ^*$	Forward Transfer Admittance	$V_{DS} = 10V$ $I_{DS} = -3A$	0.7		2	S(Ω)
I_{DSX}	Drain-Source Cut-Off Current	$V_{GS} = 10V$ $V_{DS} = -200V$			-10	mA







* Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2%

DYNAMIC CHARACTERISTICS

C_{iss}	Input Capacitance	$V_{GS} = 0$		500		pF
C_{oss}	Output Capacitance	$V_{DS} = -10V$		300		
C_{rss}	Reverse Transfer Capacitance	$f = 1.0MHz$		10		
t_{on}	Turn-On Time	$V_{DS} = -20V$		100		ns
t_{off}	Turn-Off Time	$I_D = -7A$		50		





GENERAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

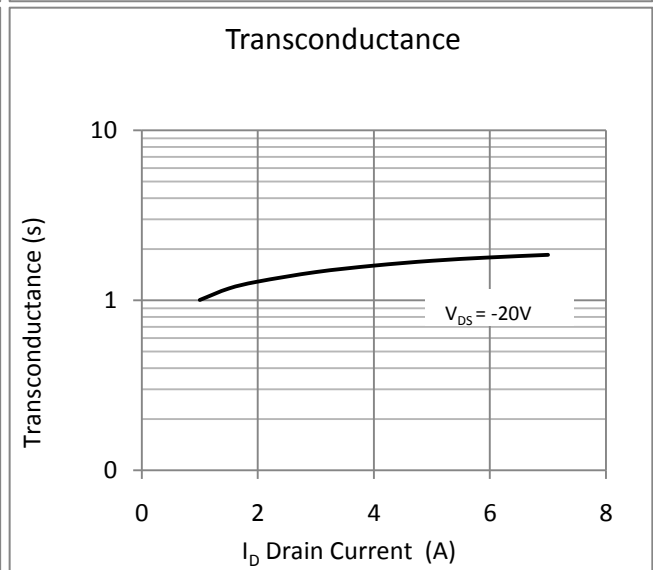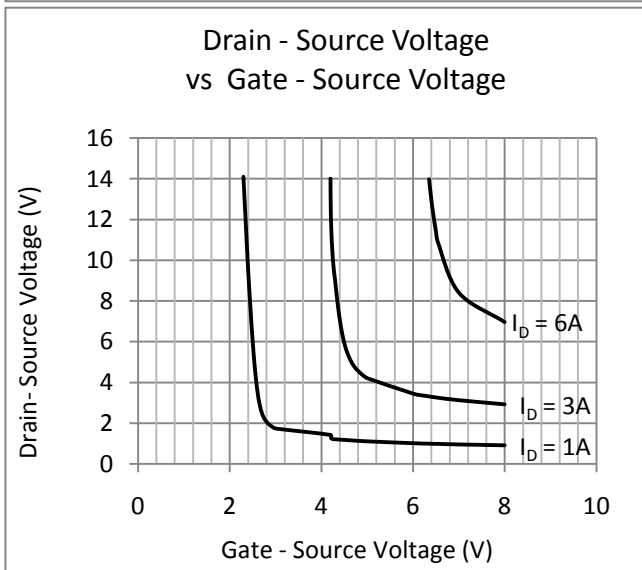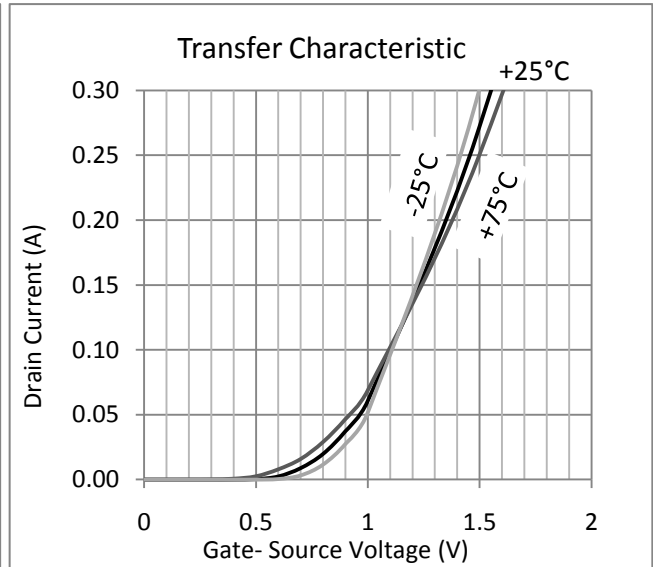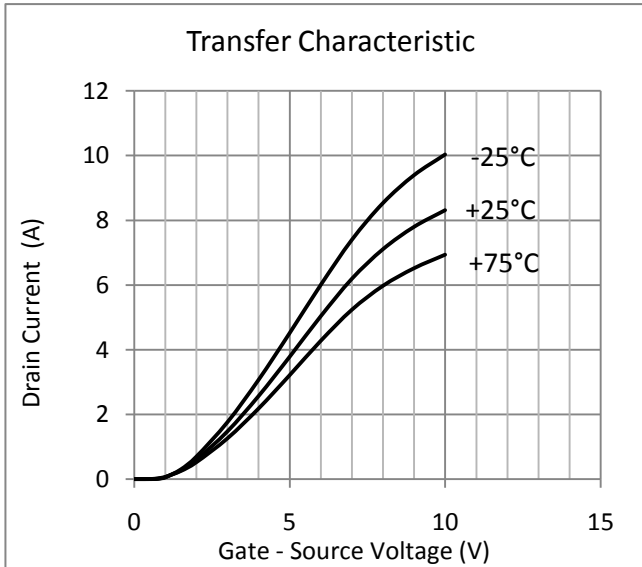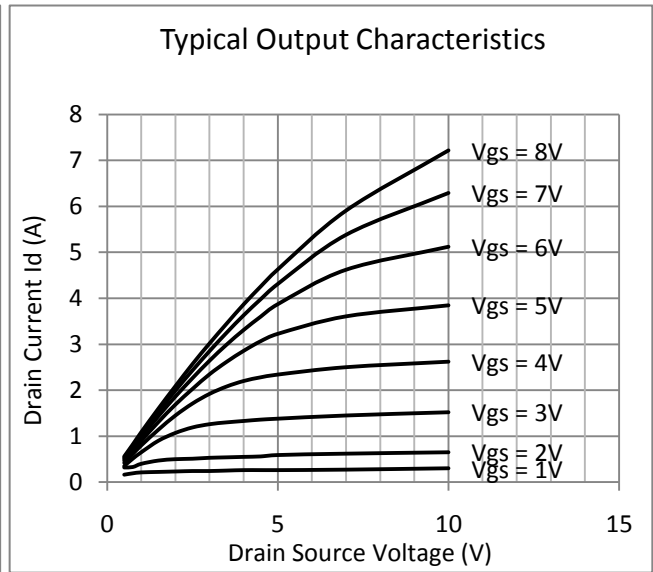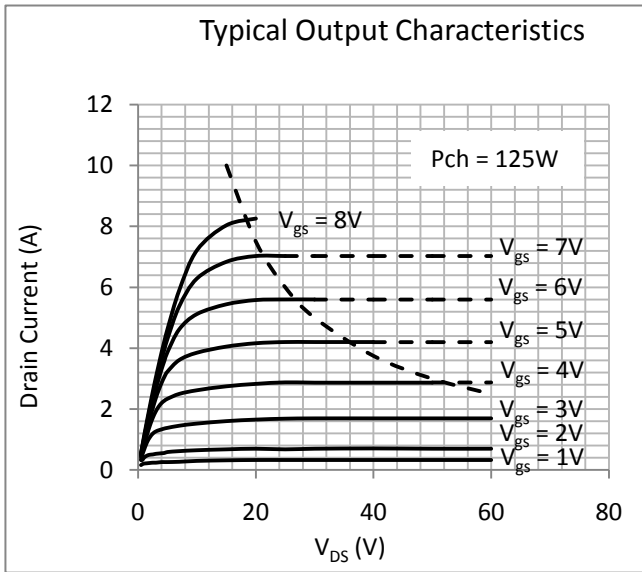




GENERAL CHARACTERISTICS CONTINUED ($T_C = 25^\circ\text{C}$ unless otherwise stated)

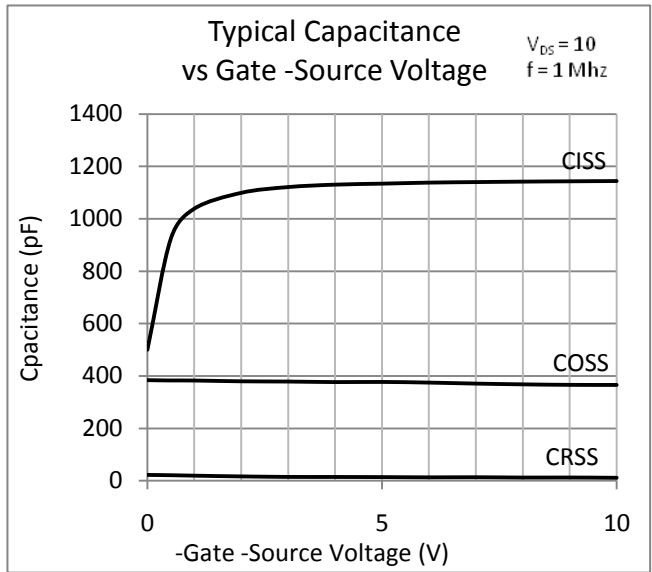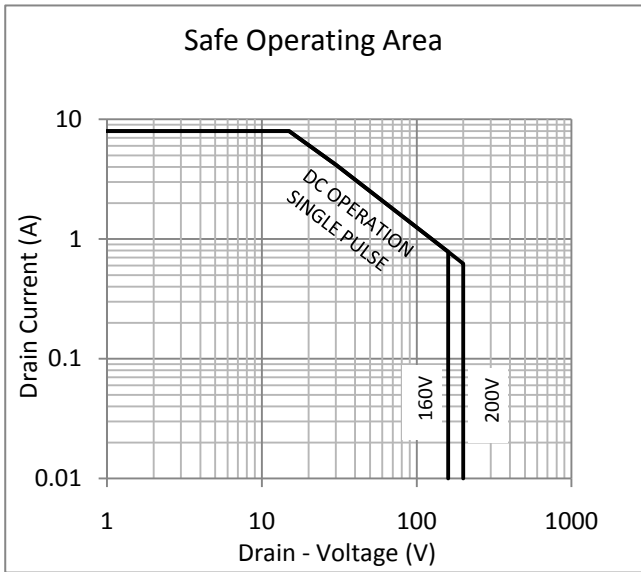

MECHANICAL DATA

Dimensions in mm (Inches)

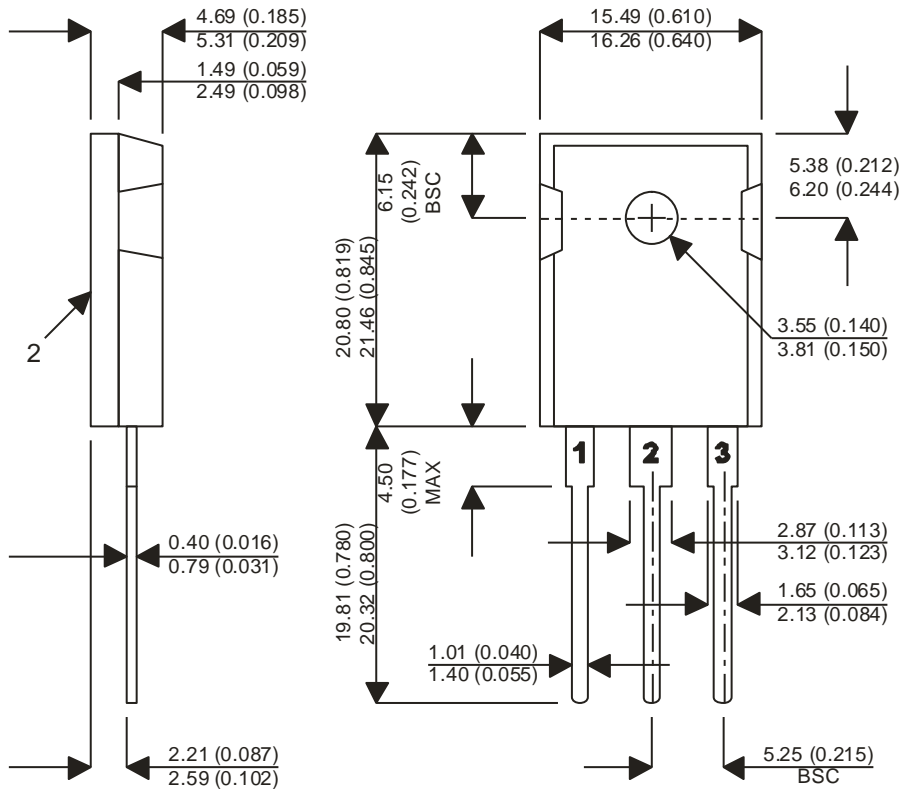

TO-247

Pin 1 - Gate Pin 2 -Source Pin 3 - Drain

Issue A April 13 2010